


## DELINEATION PLACEMENT

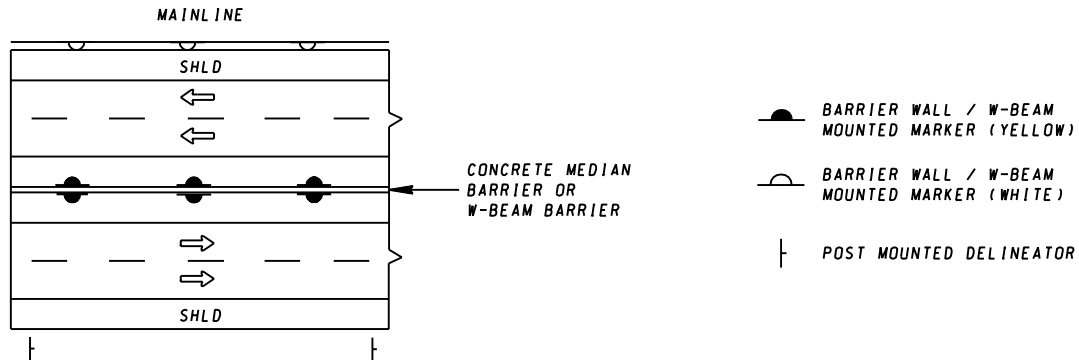

### TYPICAL SPACING FOR POST MOUNTED DELINEATORS

MAINLINE - 264'  
ACCEL/DECEL AND C/D/ ROADS - 100' (DOUBLE DELINEATORS) REFER TO STD. MD 665.05  
RAMPS - REFER TO STD. MD 665.06

### TYPICAL SPACING FOR PERMANENT BARRIER WALL MOUNTED MARKERS

(FOR ALL BARRIER WALLS WITHIN 15' OF THE TRAVEL LANE)

MAINLINE - 100' **NOTE** SPACING SHOULD BE REDUCED TO 75' IN CURVES WITH A RADIUS LESS THAN 1000' AND 50' IN CURVES WITH A RADIUS LESS THAN 300'.

ACCEL/DECEL AND C/D ROADS - 100' (DOUBLE DELINEATORS) REFER TO STD. MD 665.05  
RAMPS - REFER TO STD. MD 665.06

### TYPICAL SPACING FOR W-BEAM MOUNTED DELINEATORS


(FOR ALL W-BEAM BARRIERS WITHIN 6' OF THE SHOULDER)

MAINLINE - 100' **NOTE** SPACING SHOULD BE REDUCED TO 50' IN CURVES WITH A RADIUS LESS THAN 1000' AND IN TANGENT SECTIONS LESS THAN 500' IN LENGTH.

ACCEL/DECEL AND C/D ROADS - 100' (DOUBLE DELINEATORS) REFER TO STD. MD 665.05  
RAMPS - REFER TO STD. MD 665.06

### **NOTE**

DELINEATORS LOCATED WITHIN 50' OF A UTILITY SHOULD BE INSTALLED AT THE UTILITY AND COMBINED WITH THE APPROPRIATE UIM(S).

SPECIFICATION <b>611, 612</b>	CATEGORY CODE ITEMS
APPROVED	<i>Kirk G. McCall</i> DIRECTOR - OFFICE OF HIGHWAY DEVELOPMENT
	APPROVAL • SHA REVISIONS
	APPROVAL
	REVIS
	REVIS
	APPROVAL • FEDERAL HIGHWAY ADMINISTRATION
	APPROVAL
	REVIS
	REVIS

**Maryland Department of Transportation**  
**STATE HIGHWAY ADMINISTRATION**  
STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES

### **PLACEMENT OF DELINEATORS**

**STANDARD NO. MD 665.03**